

511,356  
10/511356  
Rec'd PCT/PTO 12 OCT 2004(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number  
WO 03/089852 A1(51) International Patent Classification<sup>7</sup>: F25B 43/04

(21) International Application Number: PCT/US03/11736

(22) International Filing Date: 15 April 2003 (15.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/373,185	17 April 2002 (17.04.2002)	US
60/373,386	17 April 2002 (17.04.2002)	US
60/374,689	23 April 2002 (23.04.2002)	US

(71) Applicant (for all designated States except US): STAN-  
HOPE PRODUCTS COMPANY [US/US]; 379 Albert  
Road, P.O.Box 6003, Brookville, OH 45309 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): EVANS, John, M.  
[US/US]; 11 Miami Conservancy Road, Piqua, OH 45356

(US). FLAUGHER, David, V. [US/US]; 3688 Napanee  
Drive, Beavercreek, OH 45430 (US). LECONEY, Dou-  
glas, E. [US/US]; 260 Five Pines Court, Clayton, OH  
45315 (US). PERRINE, Glenn, D. [US/US]; 170 Hatchet  
Drive, Eaton, OH 45320 (US).

(74) Agents: PEACOCK, Bruce, E. et al.; Wegman, Hessler &  
Vanderburg, Suite 200, 6055 Rockside Woods Boulevard,  
Cleveland, OH 44131 (US).

(81) Designated State (national): US.


(84) Designated States (regional): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: DESICCANT CARTRIDGE FOR AN INTEGRATED CONDENSER/RECEIVER AND METHOD OF MAKING  
SAME

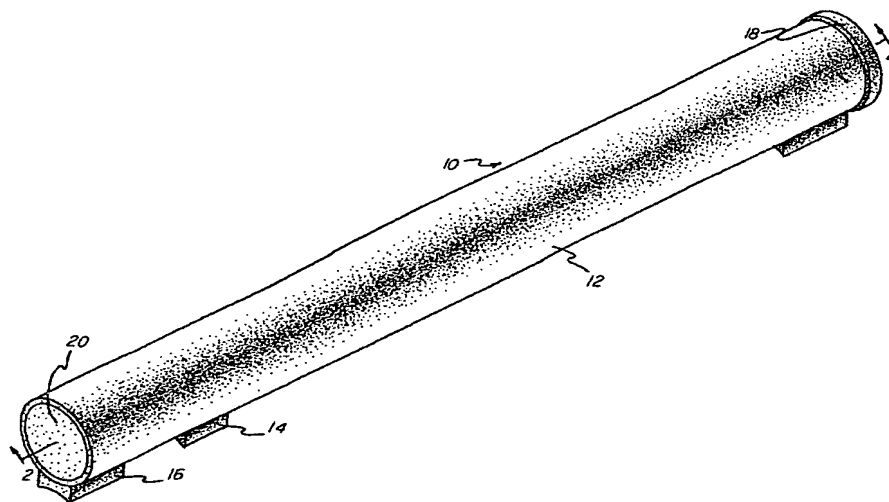

(57) Abstract: In accordance with one preferred embodiment, a desiccant cartridge (30) for insertion into an integrated condenser/receiver (10) comprises a rigid stand-off member (72) and a porous desiccant bag (34). The preferred rigid stand-off member comprises spaced inner and outer pad portions and an elongated stand-off portion terminating in the inner pad portion. The inner pad may include a tab portion. The porous desiccant bag is positioned between the inner and outer pad portions and affixed to one or both of the inner and outer pad portions. A rigid cap with a plurality of holes may be provided to which a second end of the porous desiccant bag may be attached. The porous desiccant bag includes first and second flat end seals, one of which is secured to attachment tab portions.

WO 03/089852 A1